




# Twist Lock

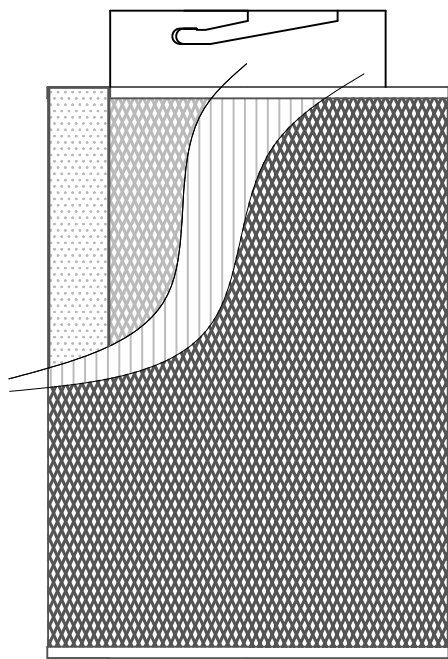


Metal mesh

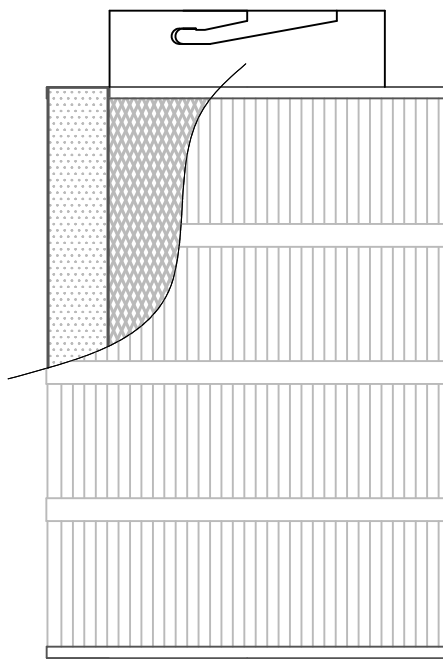

No/Kein mesh


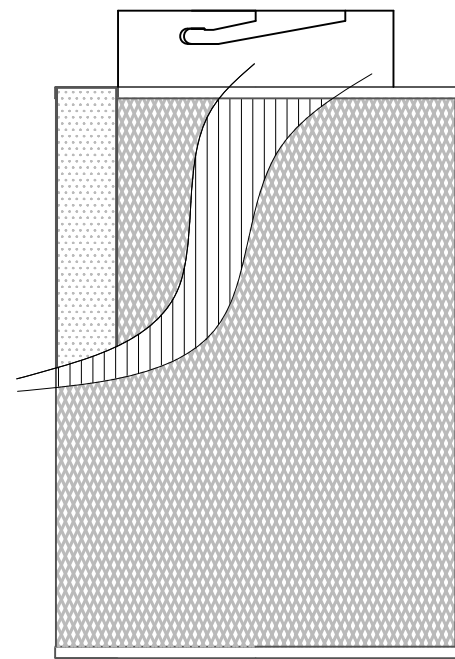


Plast mesh

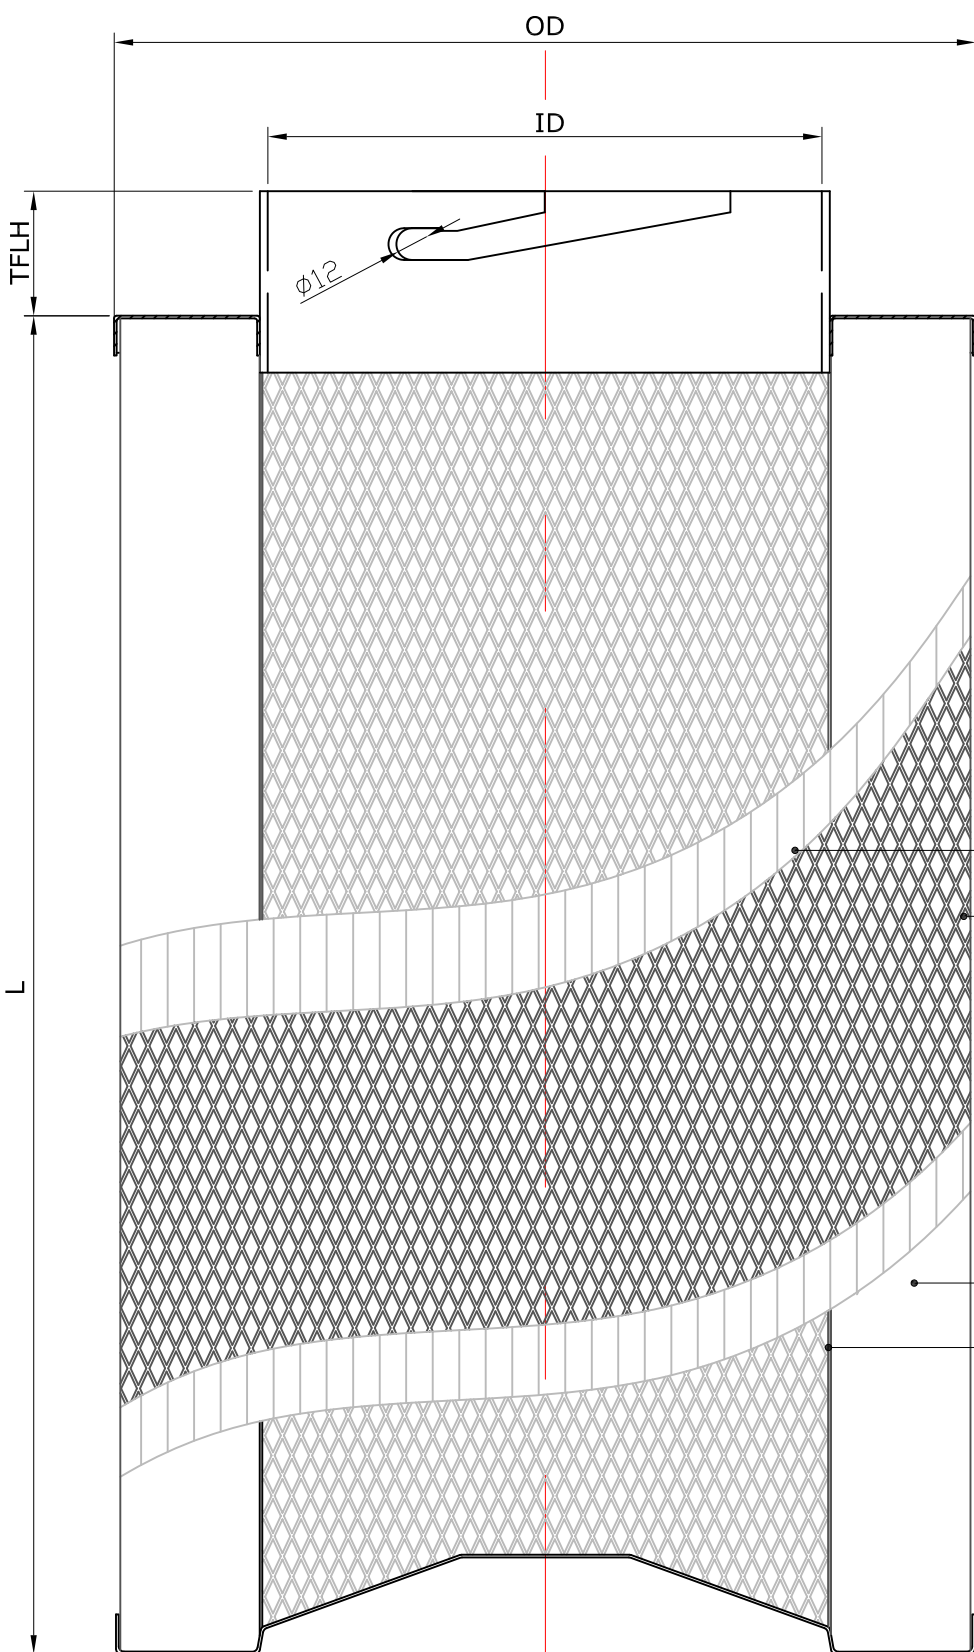

Twist USA

Twist 47/52

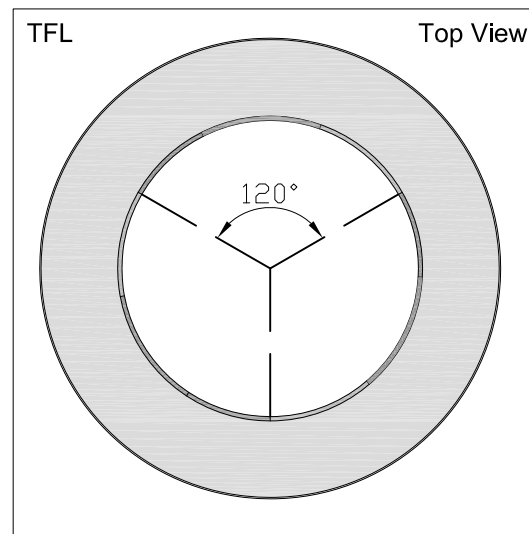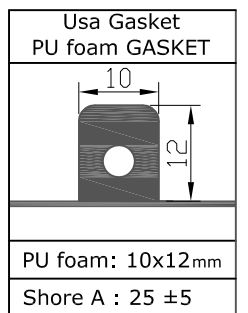

OD	Outer diameter
ID	Inner diameter
TFLH	Twist Flange Height
PU	PU Foam
EPDM	EPDM gasket
L	Length
IM	Inner mesh
OM	Outer mesh
BA	Band
PH	Pleated height
PNB	Pleated number
PM2	Pleated m2
TFL	Top flange
BFL	Bottom flange

Twist	47	52	USA
OD	325	325	325
ID	209	209	209
TFLH	47	52	29
L	300-1400	300-1400	300-1400
IM	metal plast	metal plast	metal plast
OM	metal (m) plast (p) non/kein (n)	metal (m) plast (p) non/kein (n)	metal (m) plast (p) non/kein (n)
BA	*** (n)	*** (n)	*** (n)
PH	$\frac{m}{>28} / \frac{p}{>26} / \frac{n}{>30}$	$\frac{m}{>28} / \frac{p}{>26} / \frac{n}{>30}$	$\frac{m}{>48} / \frac{p}{>48} / \frac{n}{>48}$
PNB	50-150	50-150	50-150
PM2	$2 * \left(\frac{ph}{1000}\right) * PNB * \left(\frac{L}{1000}\right) = m^2$		
TFL	Galv. steel Steel (V2A) cast iron	Galv. steel Steel (V2A) cast iron	Galv. steel Steel (V2A) cast iron
BFL	Galv. steel Steel (V2A) cast iron	Galv. steel Steel (V2A) cast iron	Galv. steel Steel (V2A) cast iron

\*\* defined by customer      \*\*\* defined by Nordic

All dimensions are in mm  
Alles dimensionen ist in mm  
Alle mål er i mm

**DO NOT SCALE**

All rights too manufacture. Copy, or dispose of this writing or it's contents are reserved unless otherwise specified in writing by Nordic Air Filtration A/S.

## Nordic Air Filtration A/S



**Denmark**  
date: 17.07.2008  
drawing no.  
scale:  
made by: TRP  
approved:

Indentification: Twist Lock Cartridge

Type: Twist Lock

Materials:

Spec No.:

Nordic Air Filtration A/S - Bergenevej 1 - DK-4900 Nakskov - Denmark  
E-mail: sales@nordic-air-filtration.com - www.nordic-air-filtration.com  
Phone: +45 5495 1390 - Fax: +45 5495 1363