




DIN open/close

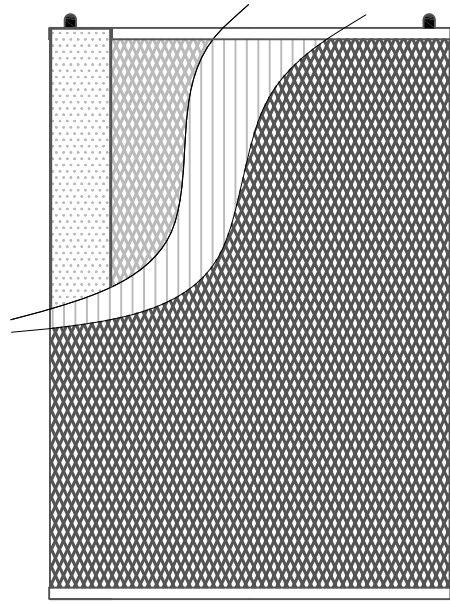

Metal mesh

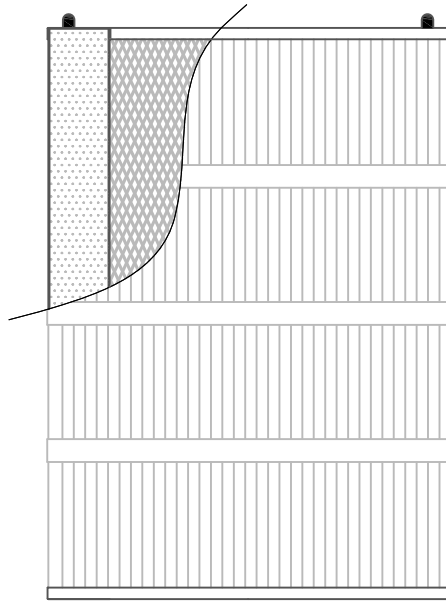

No/Kein mesh

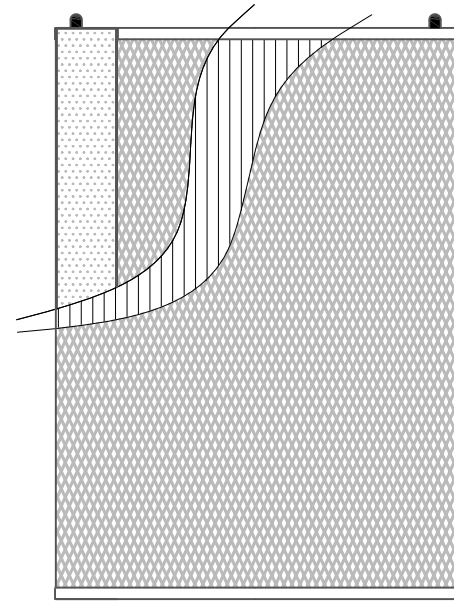

Plast mesh

EPDM GASKET

EPDM: 10x12mm
Shore A : 25 ±5

PU foam GASKET

PU foam: 10x12mm
Shore A : 25 ±5

OD	Outer diameter
ID	Inner diameter
GD	Gasket diameter
PU	PU Foam
EPDM	EPDM gasket
L	Length
IM	Inner mesh
OM	Outer mesh
BA	Band
PH	Pleated height
PNB	Pleated number
PM2	Pleated m2
TFL	Top flange
BFL	Bottom flange

DIN O/O	CD150	CD225	CD325	CD351
OD	150	225	325	351
ID	85/95	143	215	241
GD	EDPM **	EDPM **	PU 263	PU 315
L	300-1400	300-1400	300-1400	300-1400
IM	metal plast	metal plast	metal plast	metal plast
OM	metal (m) plast (p) non/kein (n)	metal (m) plast (p) non/kein (n)	metal (m) plast (p) non/kein (n)	metal (m) plast (p) non/kein (n)
BA	*** (n)	*** (n)	*** (n)	*** (n)
PH	$\frac{m}{>28} / \frac{p}{>26} / \frac{n}{>30}$	$\frac{m}{>28} / \frac{p}{>26} / \frac{n}{>30}$	$\frac{m}{>48} / \frac{p}{>48} / \frac{n}{>48}$	$\frac{m}{>50} / \frac{p}{>50} / \frac{n}{>50}$
PNB	50-150	50-150	50-150	50-150
PM2	$2 * (\frac{ph}{1000}) * PNB * (\frac{L}{1000}) = m^2$			
TFL	Plast Galv. steel Steel (V2A) cast iron	Plast Galv. steel Steel (V2A) cast iron	Plast Galv. steel Steel (V2A) cast iron	Plast Galv. steel Steel (V2A) cast iron
BFL	Plast Galv. steel Steel (V2A) cast iron	Plast Galv. steel Steel (V2A) cast iron	Plast Galv. steel Steel (V2A) cast iron	Plast Galv. steel Steel (V2A) cast iron


Hole/loch non/kein Ø13 Ø17 Ø28 (**)

** defined by customer *** defined by Nordic

All dimentionen are in mm
Alles dimentionen ist in mm
Alle måt er i mm

DO NOT SCALE

All rights too manufacture. Copy, or dispose of this writing or it's contents are reserved unless otherwise specified in writting by Nordic Air Filtration A/S.

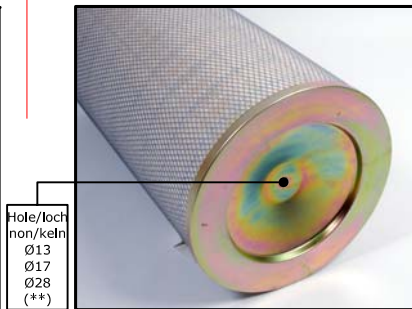

Nordic Air Filtration A/S

Denmark
date: 21.07.2008

Indentification: DIN Cartridge Open/Close	drawing no.
Type: CD	scale:
Materials:	made by: TRP
Spec No.:	approved:

Nordic Air Filtration A/S - Bergenvej 1 - DK-4900 Nakskov - Denmark
E-mail: sales@nordic-air-filtration.com - www.nordic-air-filtration.com
Phone: +45 5495 1390 - Fax: +45 5495 1363